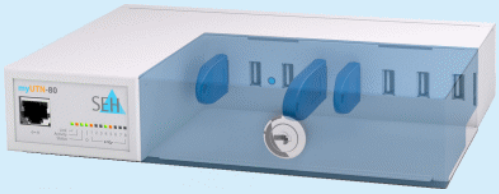

USB Device and Network Connectors

- USB Device Connector
  8 x USB 2.0 HS (Type A Connector)
- Network Connection (logical)
  IEEE 802.3 (10BaseT Ethernet)
  IEEE 802.3 (100BaseTX Fast Ethernet)
- Network Connection (physical)
  RJ45 (STP Cat.5)

Configuration and Management

- SEH UTN Manager
  32/64bit
  MS Windows (XP, 2003 Server, 2008 Server, Vista, Windows 7)
- InterCon-NetTool
  32bit
  MS Windows (XP, 2003 Server, 2008 Server, Vista, Windows 7)
- myUTN Control Center
  Minimum Browser Requirement: Frame compatible
- SNMPv1, SNMPv3
  SNMP-MIB II compatible, SEH private enterprise MIB
- Email

Supported Operating Systems

- Microsoft Windows
  XP
  2003 Server
  2008 Server
  Vista
  Windows 7

Supported Protocols

- TCP/IP
  DHCP, BootP, ARP, IPv4, IPv6, IPv6 / TCP, IPv6 / ICMP, IPv6 / HTTP, HTTPs, IPv6 / SSL, TLS, TCP, UDP, ICMP, IGMP, TFTP, HTTP, HTTPs, ZeroConf, DNS, SLP, SNMPv1, SNMPv3, SNTP, SMTP, POP3, SSL/TLS, Apple Bonjour

Security

- SSL 3.0
- TLS 1.0
- HTTPs
- 802.1X
  EAP-MD5
  EAP-TLS
  EAP-TTLS
  EAP-FAST
  EAP-PEAP
  Cisco EAP (LEAP)
- TCP Port Access
- USB Port Access
  Port Key Control
  Device Assignment
- Certificate Management
  Self signed Certificate
  Certificate request
  Root Certificate
- S/MIME Certificate
- pkcs(12)
- Password Protection

Supported Languages

- English
- German
- French
- Spanish
- Italian
- Portuguese
- Japanese
- Corean
- Chinese (traditional)
- Chinese (simplified)

Technical Data

- USB Device Connector
  8 x USB 2.0 HS (Type A Connector)
- Network Connection (logical)
  IEEE 802.3 (10BaseT Ethernet)
  IEEE 802.3 (100BaseTX Fast Ethernet)
- Network Connection (physical)
  RJ45 (STP Cat.5)
- Tests (Notifications)
  CE: EN55022 Klasse B, EN55024, EN62301
  FCC Class B
  VCCI Class B
  C-Tick
  RoHS
- Operating Environment
  Ambient temperature 5 - 40 °C
  Relative humidity: 20 - 80 %
  Indoor use only
- Hardware
  4MB Flash
  32MB RAM
  MIPS based RISC Processor / 170 Mhz
- Power Supply
  external Power Supply (Output: 12V,2.5A; Input: 100-240V~)
  max. 2500mA @ 12V DC
- Dimensions (Depth, Width, Height)
  215 x 155 x 45 mm
- Weight
  1,050 g

© 2011 SEH Computertechnik GmbH - Südring 11 - 33647 Bielefeld - Germany
Tel.: +49 (0)521 94226-29 - Fax: +49 (0)521 94226-99 - E-Mail: info@seh.de - Web: http://www.seh.de

Package

- myUTN-80 USB Dongle Server
- Quick Installation Guide
- Product CD
- Power Supply
- Voltage supply cable

Order Numbers

- M05200 (Euro)
- M05201 (UK)
- M05202 (US)
- M05203 (JP)
- M05204 (AUS)

© 2011 SEH Computertechnik GmbH - Südring 11 - 33647 Bielefeld - Germany
Tel.: +49 (0)521 94226-29 - Fax: +49 (0)521 94226-99 - E-Mail: info@seh.de - Web: http://www.seh.de